



Canopy **M10-30**

Pump specifications:

Type.....	BA300E D355
Max. flow	1300 m ³ /hour (5720 US GPM)
Max. pressure	22 mwc (73 ft.)
Connections.....	DN300 (12")
Solids handling	120 x 105 mm
Impeller type	Semi-open impeller
Priming system	BBA MP100
Motor.....	75 kW – 4 pole
Voltage	400/690V 50 Hz
Motor control options	DOL – soft starter – VFD
Frame or canopy	17-35 or M10-30
Weight (approx.)	2500 kg / 3000 kg

FEATURES

BA auto prime pump

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring the 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

World-class performance

The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and electric motors, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of “Lowest cost of ownership”.

Electric pumps in canopy

- Extremely low noise level
- Maximum safety while running
- Better resistant to vandalism
- More space for your branding
- Optimal weather protection
- Minimal ageing, therefore stable in value

Complete package designed & built by BBA Pumps

- Complete in-house design & production
- Over 60 years of experience in the market
- Extensive testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available

After sales service & product support





- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing
- Extensive training options available (technical & commercial), on-site or in-house



Base frame **17-35**

PERFORMANCE CURVES (1490 RPM)

Continuous duty according ISO 9906

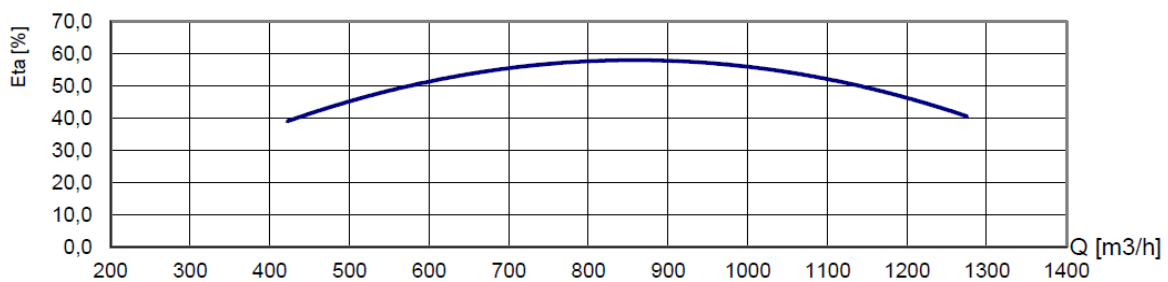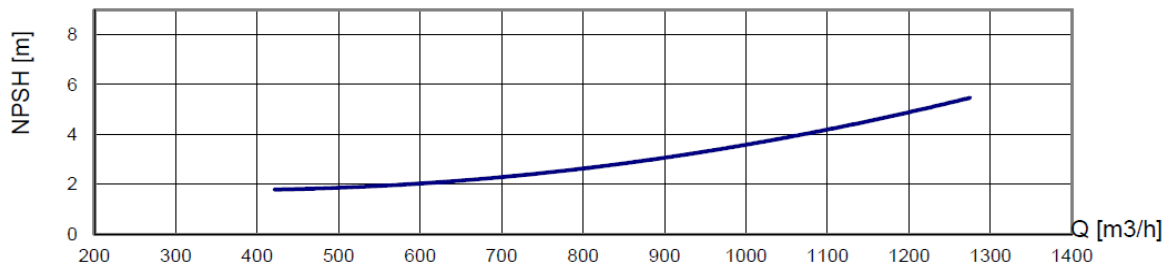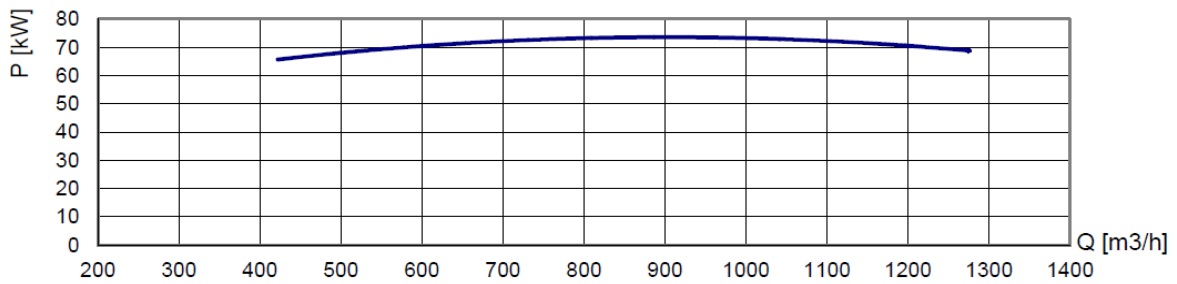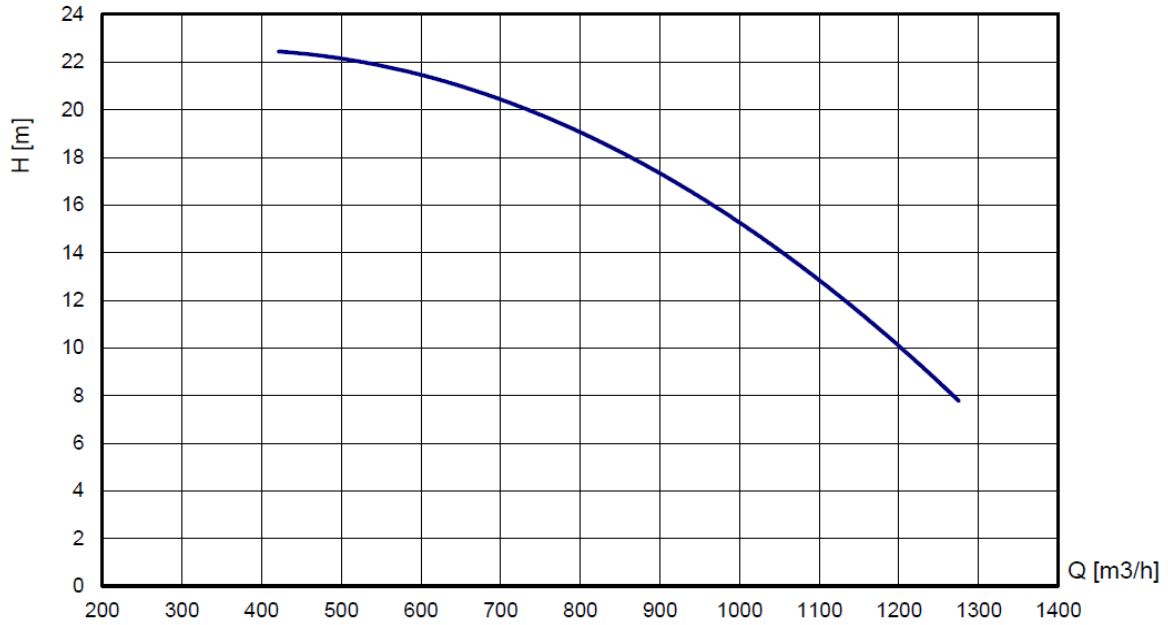

STANDARD TECHNICAL SPECIFICATIONS

BBA auto prime pump

Pump type.....	BA300E D355
Max. flow.....	1300 m ³ /hour (5720 US GPM)
Max. head.....	22 mwc (73 feet)
Impeller type.....	Semi-open impeller
Solids handling.....	120 x 105 mm (4,7" x 4,1")
Pump casing.....	Cast iron GG20
Impeller.....	Ductile iron GGG70
Wear plate.....	Cast iron GG25
Pump shaft.....	42CrV6
Shaft seal.....	Mechanical seal
Seal faces.....	Tung/Tung
O-ring.....	Viton



BBA priming system

Pump type.....	BBA MP100 Diaphragm pump
Air handling capacity.....	100 m ³ /h (59 cfm)
Max. vacuum.....	8.5 m (29 Hg)
Float box.....	Steel hot dip galvanised
Non return valve.....	Cast iron GG25
Check valve disc.....	Buna-N



Electric motor

Motor brand.....	Hoyer
Motor type.....	HMC3 280S-4
Power kW (hp).....	75 kW
Rated Voltage.....	400/690V 50Hz
Current (I nom.).....	130 Amp
4-pole.....	1490 RPM
Efficiency.....	95.5%
IE3.....	EC Directive 2005/32



Non return valve


Model/size.....	DN300 (12")
Casing.....	GG25
Shaft.....	Not applicable
Sealing.....	Gasket
Cover.....	On top
Check valve.....	Buna N disc
Drain.....	Gate valve



CANOPY M10-30

BBA sound attenuating canopy

- Canopy type.....M10-30
- Dimensions L x W x H 3621 x 1050 x 2160 mm
- Dimensions L x W x H 143 x 41.4 x 85 inch
- Basic frame Hot dip galvanised
- Panels and doors..... Composite ABS/ASA
- Doors 6 Easy-access doors (lockable)
- Forklift pockets..... Fitted with 2 forklift pockets
- Lifting point Fitted with 2 lifting points
- Motor control..... VFD will be mounted outside the canopy (due to limited space)
- Connections..... 12" DIN / ANSI flange with PCD K400 / K431,8 (12 holes)
- Documentation box..... BBA user manual & BBA warranty book

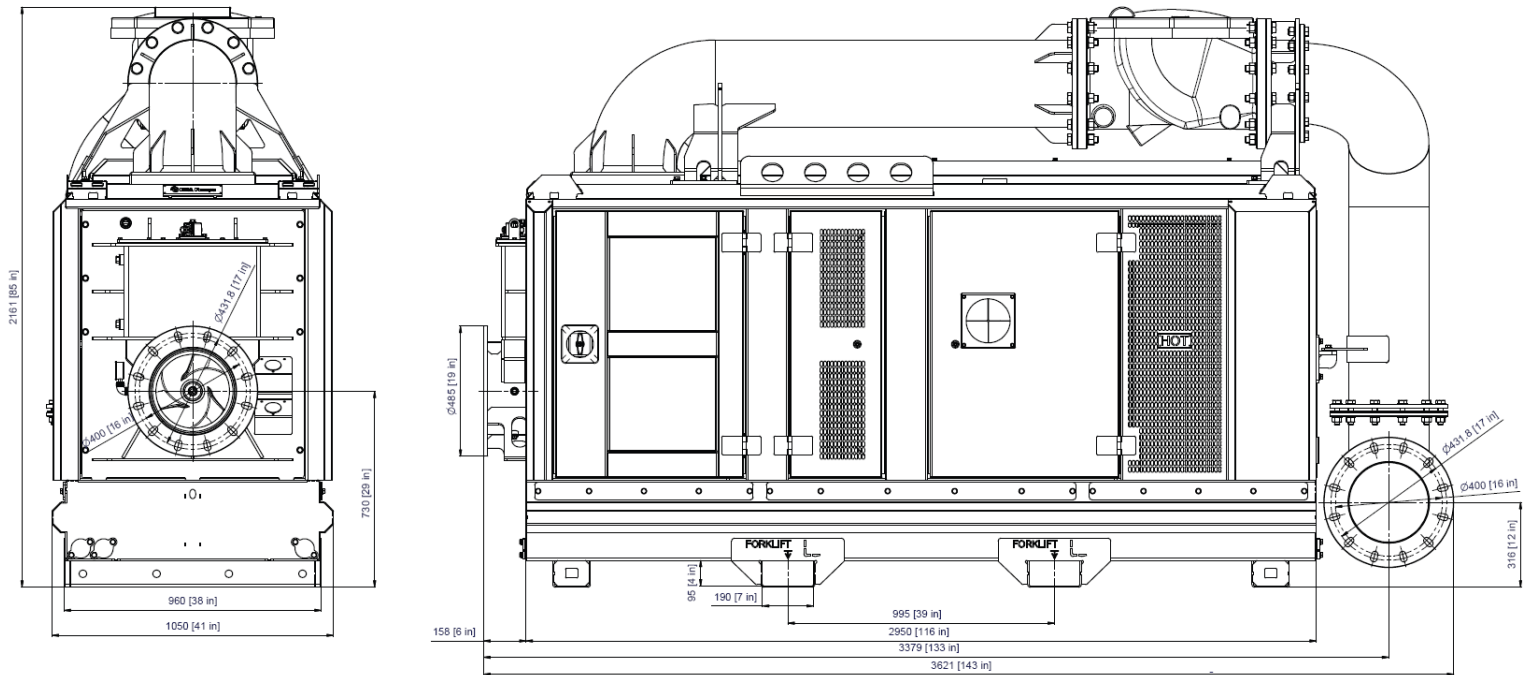

Actual dimensions (in mm and inches) may vary depending on selected quick couplings.



Easy inspection
Oil glasses, drain valves and fill plugs all easily accessible.



Large inspection covers
Easy access to float box, impeller and non-return valve.



Safety
Extremely durable and lockable T-locks offering perfect grip.



Double vacuum pump
Diaphragm pump, air-cooled, water-resistant and oil-spillage free.
Air capacity of 100 m³ per hour.



4 Year limited warranty
The BBA limited warranty covers years or operating hours whichever occurs first. For more details please consult the BBA warranty book.



User Manual
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.

Myynti: Aquator Oy
puh. 044 788 1620
puh. 044 088 1620
info@aquator.fi

AQUATOR
water technologies

Pictures used are for illustration purposes only.