

# Electric pump

## EL20

### PUMP SPECIFICATIONS

Capacity [m <sup>3</sup> /h]	100
Head [m]	18
Impeller diameter [mm]/type	325/3 blades opened
Hose adaptor diameter [mm]	100
Cross section diameter [mm]	25
Weight (without cable) [kg]	310

### ELECTRIC MOTOR

Power [kW-HP]	15-20
Voltage [V]/Current [A]	230-400/47-26
Phases/Poles/Frequency [Hz]	3/4/50
Speed [RPM]	1450
Insulation class	H
Power cable 20m (IEC 60245- 4)	H07RN-F 4G16

### MATERIALS

Casing	Spheroidal cast iron EN-GJS-500-7 (EN 1563)
Motor housing	Spheroidal cast iron EN-GJS-500-7 (EN 1563)
Wear parts	High chrome EN-GJN-HV600 (XCr18) (EN 12513)
Main shaft	High tensile steel 39NiCrMo3 (AISI 9840)


### SEALS / LUBRICANT

Motor side seals	1 mechanical seal (silicon carbide in oil bath)
Impeller side seals	1 mechanical seal (silicon carbide in oil bath) + 4 lip seal (2 BUNA + 2 TPU)
Oil type	ISO 32


### DIMENSIONS [mm]

H	W	D	F	H1	PG
1045	545	435	415	550	100

### PERFORMANCE CURVES

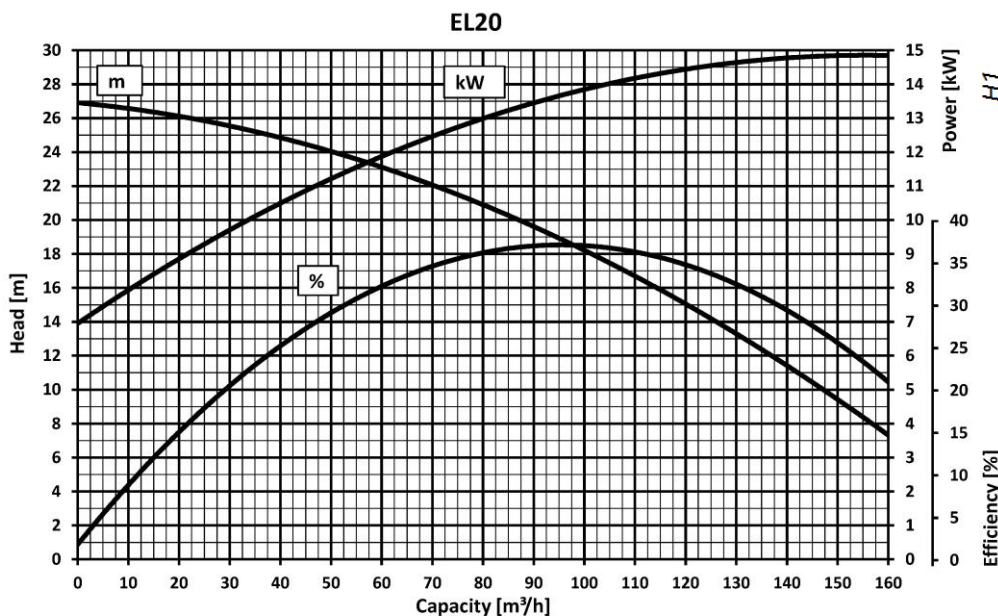

We reserve the right to make changes without notice

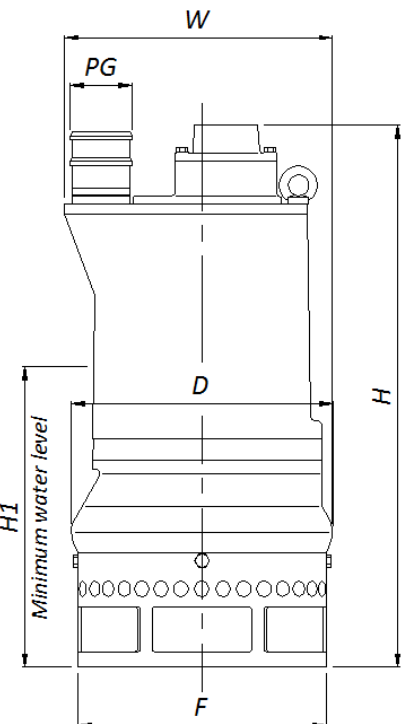

EL20 50Hz ENG.docx

Myynti: Aquator Oy  
puh. 044 788 1620  
puh. 044 088 1620  
info@aquator.fi

**AQUATOR**  
water technologies

**DRAGFLOW**  
ULTIMATE EFFICIENCY